

Turn-key Integrated Raman Probe



Features



- 2-3X Higher Throughput than Standard Raman Probes (sample dependent)
- 785 nm Standard Wavelength Stabilized Excitation Source
- Single-mode TEM₀₀ or Narrow Linewidth Multi-mode options
- High Throughput Optical Design with 200cm⁻¹ Cut-on
- User-Friendly Ergonomic Design
- Removable Distance Regulator[†] for Easy Sampling
- OEM Version Available (ask about this option)



RPMC Lasers is proud to introduce an ultra-high throughput Integrated Raman Probe. This novel device includes an integrated wavelength stabilized laser source with Raman filter packs, beam shaping optics and high efficiency Raman spectra collection optics. The probe interfaces with any fiber coupled spectrometer and simplifies operation and set-up.

The Integrated Raman Probe incorporates our wavelength stabilized hybrid external cavity laser (HECL) with a proprietary optical design to offer unmatched performance (typically 2 – 3X higher collection efficiency over traditional Raman probes). RPMC's Integrated Raman Probe also comes complete with a UL/CE, and IEC certified control box - providing a variety of power control options including modulation capability (TTL & analog) and a USB computer interface.

[†] – Distance regulator available only for 9 mm working distance. 9 mm working distance is optimal if using RPMC sample holder.

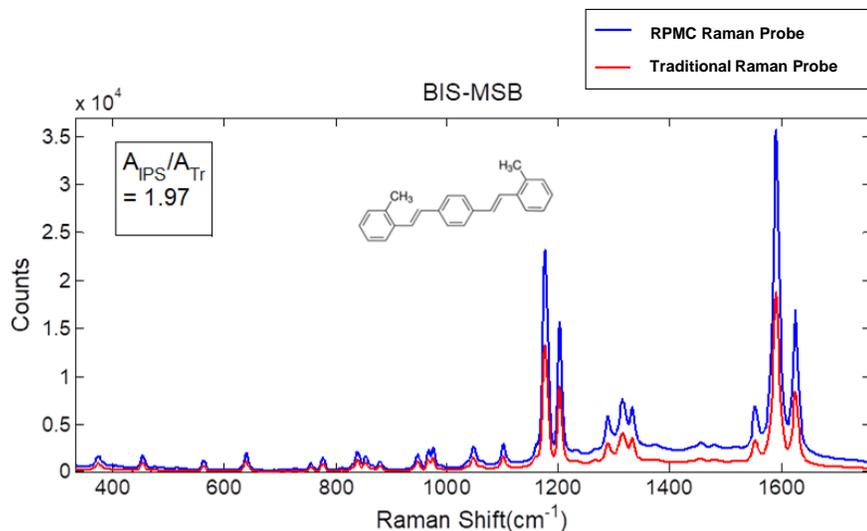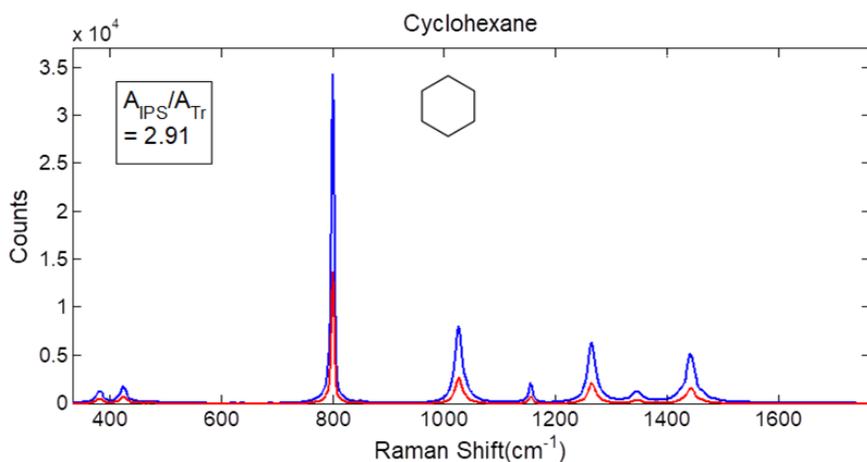


Integrated Raman Probe Specifications

Parameter	Unit
Excitation Options	Multi-mode 785 nm wavelength stabilized laser <0.15 nm FWHM bandwidth (0.1 nm typical)
	Single-mode 785 nm TEM00 wavelength stabilized laser < 100 MHz FWHM bandwidth
Collection	1 meter long armor jacketed fiber, 200 micron round core, 0.22 NA
Cut-on	200 cm ⁻¹ cut-on
Electronic Connection	DB9 cable with safety interlock
Power Control	Manual power adjustment knob, Analog / TTL modulation via BNC connector, or MicroUSB
Power Supply	3 - 5 A max, 5VDC
Shaft Material	316L Stainless Steel
Fiber Bend Radius	4 inches
Working Distances	3 mm, 4.5 mm, 7.2 mm, and 9 mm, and 11 mm standard (+/- 0.5 mm) Custom distances available upon request
Operating Temperature	15 degrees C to 35 degrees C
Storage Temperature	- 20 degrees C to + 80 degrees C
Humidity	0 - 80% non-condensing

Parameter	Unit	Min	Typ	Max	Notes
Output power stability	%		± 1		Timescale dependent
Wavelength Tolerance	nm	-0.5		+0.5	From center wavelength
3 dB bandwidth (FWHM)	nm		0.1	0.15	Multi-mode Standard Spectral Linewidth
	MHz		50	100	Single-mode
Operating Temperature Range (Case)	Deg C	15		35	Case Temperature
Power Consumption	W		3	7	Case temp between 15 and 35 deg C
Wavelength Stability	Seconds			180	Cold Start - to < 1 wavenumber
				1	Warm Start - to < 1 wavenumber
				3	Warm Start - to < 0.1 wavenumber

Part Numbering Schema

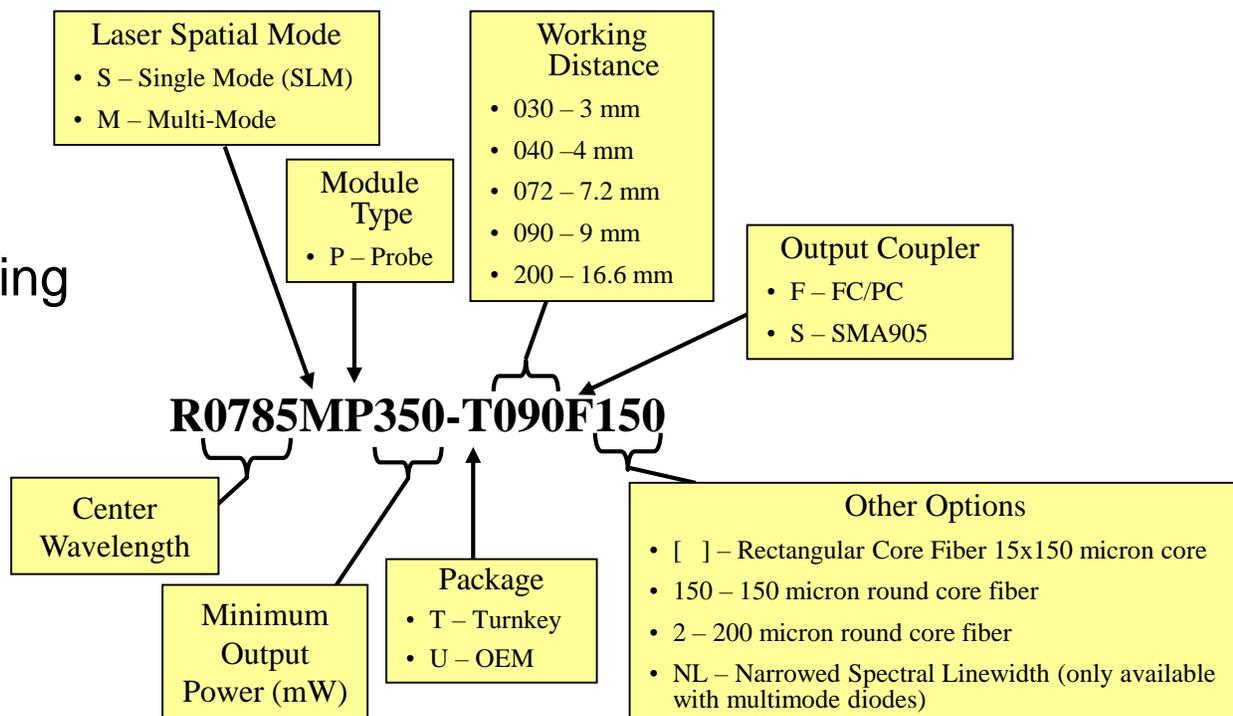


Standard 785 nm Integrated Raman Probes


Wavelength (nm)	Min. Power (mW)	Laser Type	Connector	Working Distance	Part Number (P/N)
785	100	Single-Mode (TEM ₀₀)	SMA	3 mm	R0785SP100-T030S2
				4.5 mm	R0785SP100-T040S2
				7.2 mm	R0785SP100-T072S2
				9 mm	R0785SP100-T090S2
			FC/PC	3 mm	R0785SP100-T030F2
				4.5 mm	R0785SP100-T040F2
				7.2 mm	R0785SP100-T072F2
				9 mm	R0785SP100-T090F2
785	350	Multi-Mode	SMA	3 mm	R0785MP350-T030S2
				4.5 mm	R0785MP350-T040S2
				7.2 mm	R0785MP350-T072S2
				9 mm	R0785MP350-T090S2
			FC/PC	3 mm	R0785MP350-T030F2
				4.5 mm	R0785MP350-T040F2
				7.2 mm	R0785MP350-T072F2
				9 mm	R0785MP350-T090F2
785	450	Multi-Mode	SMA	3 mm	R0785MP450-T030S2
				4.5 mm	R0785MP450-T040S2
				7.2 mm	R0785MP450-T072S2
				9 mm	R0785MP450-T090S2
			FC/PC	3 mm	R0785MP450-T030F2
				4.5 mm	R0785MP450-T040F2
				7.2 mm	R0785MP450-T072F2
				9 mm	R0785MP450-T090F2

Mechanical Specifications Integrated Raman Probe

Probe Head

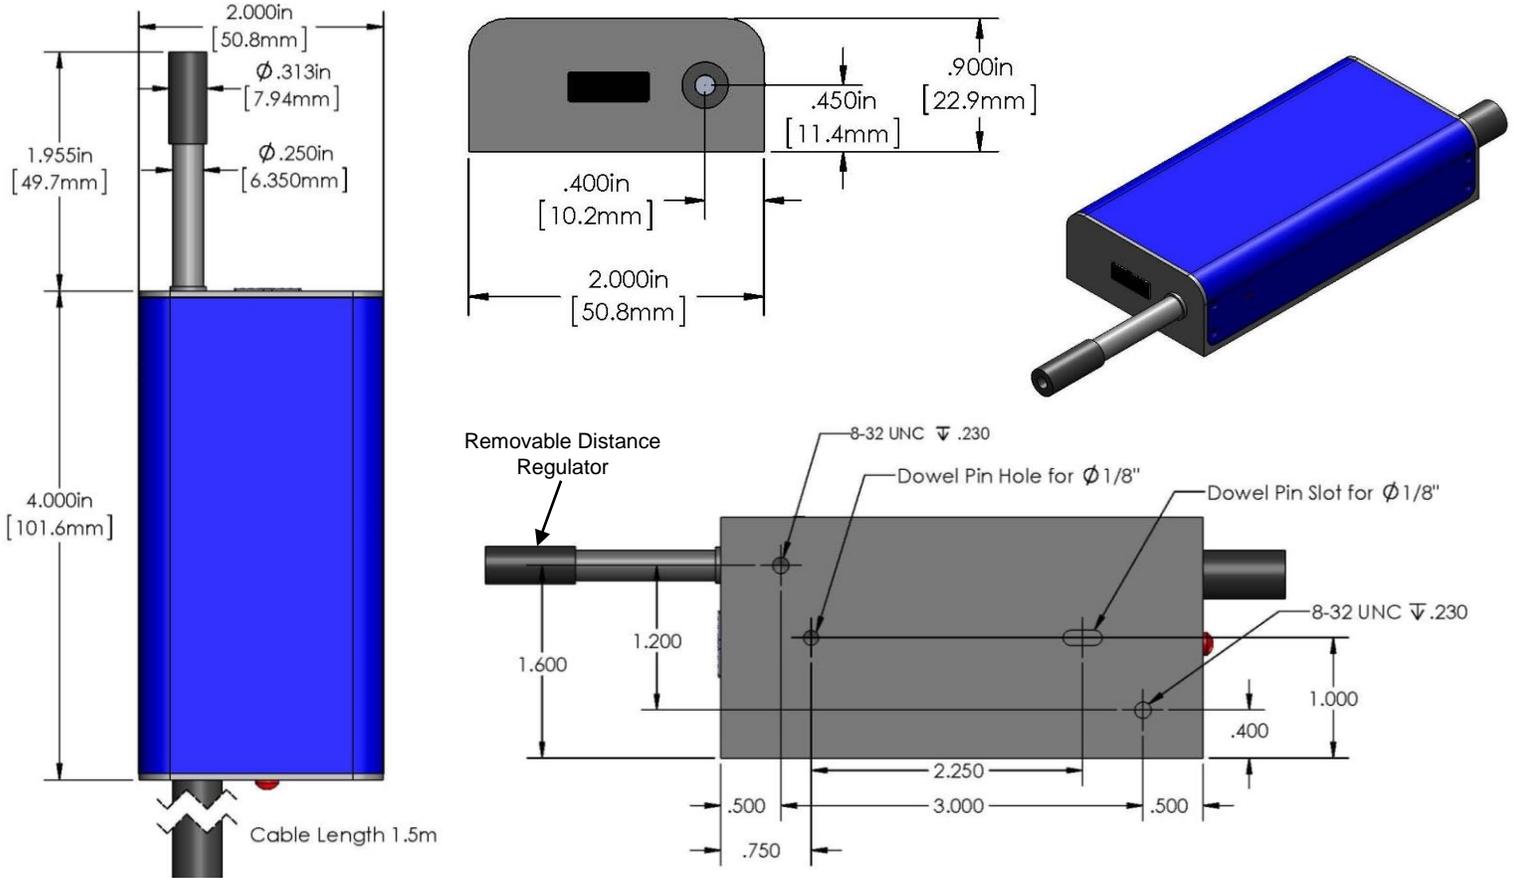


Control Module

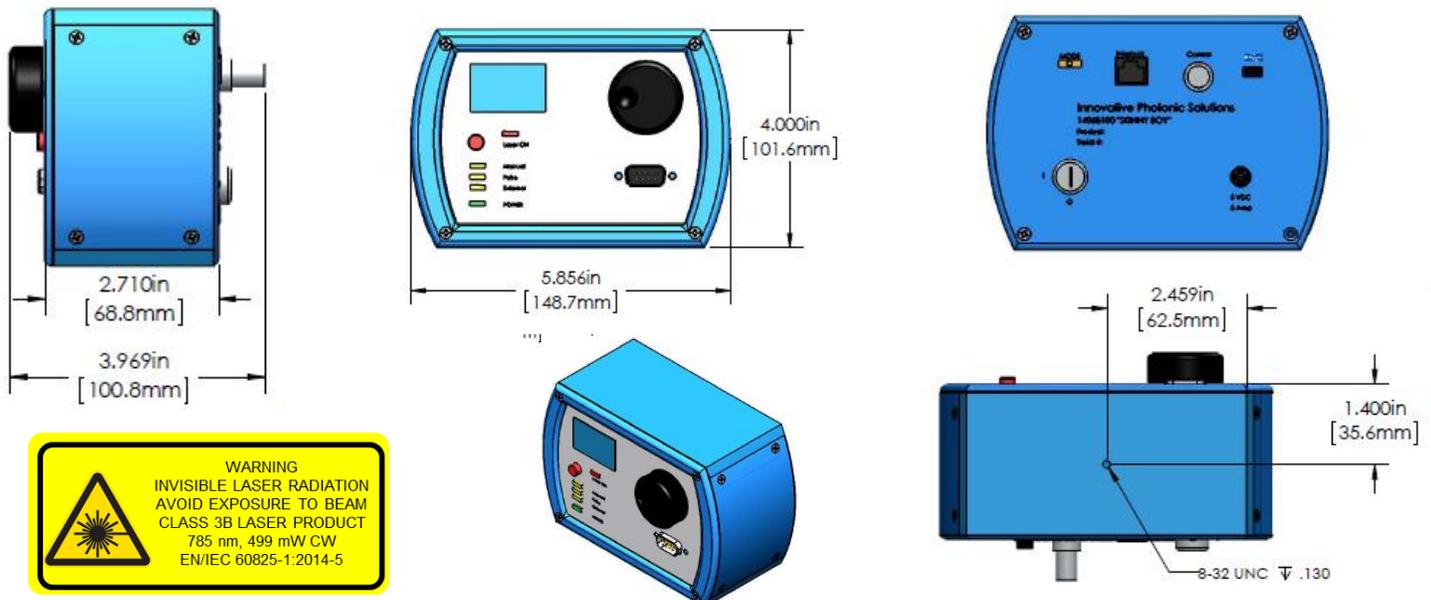

XYZ Stage

- Manually adjustable X-Y-Z stage for use with RPMC 785nm integrated Raman probe
- Comes standard with specialized lens tube for use with RPMC Integrated Raman Probe and XYZ Stage
- The Z adjust allows for precise focusing of laser on the sample, while the X-Y adjust allows for easy sampling of multiple points object
- The stage allows for 30mm of travel in X and Y
- Minimal assembly required, screws included

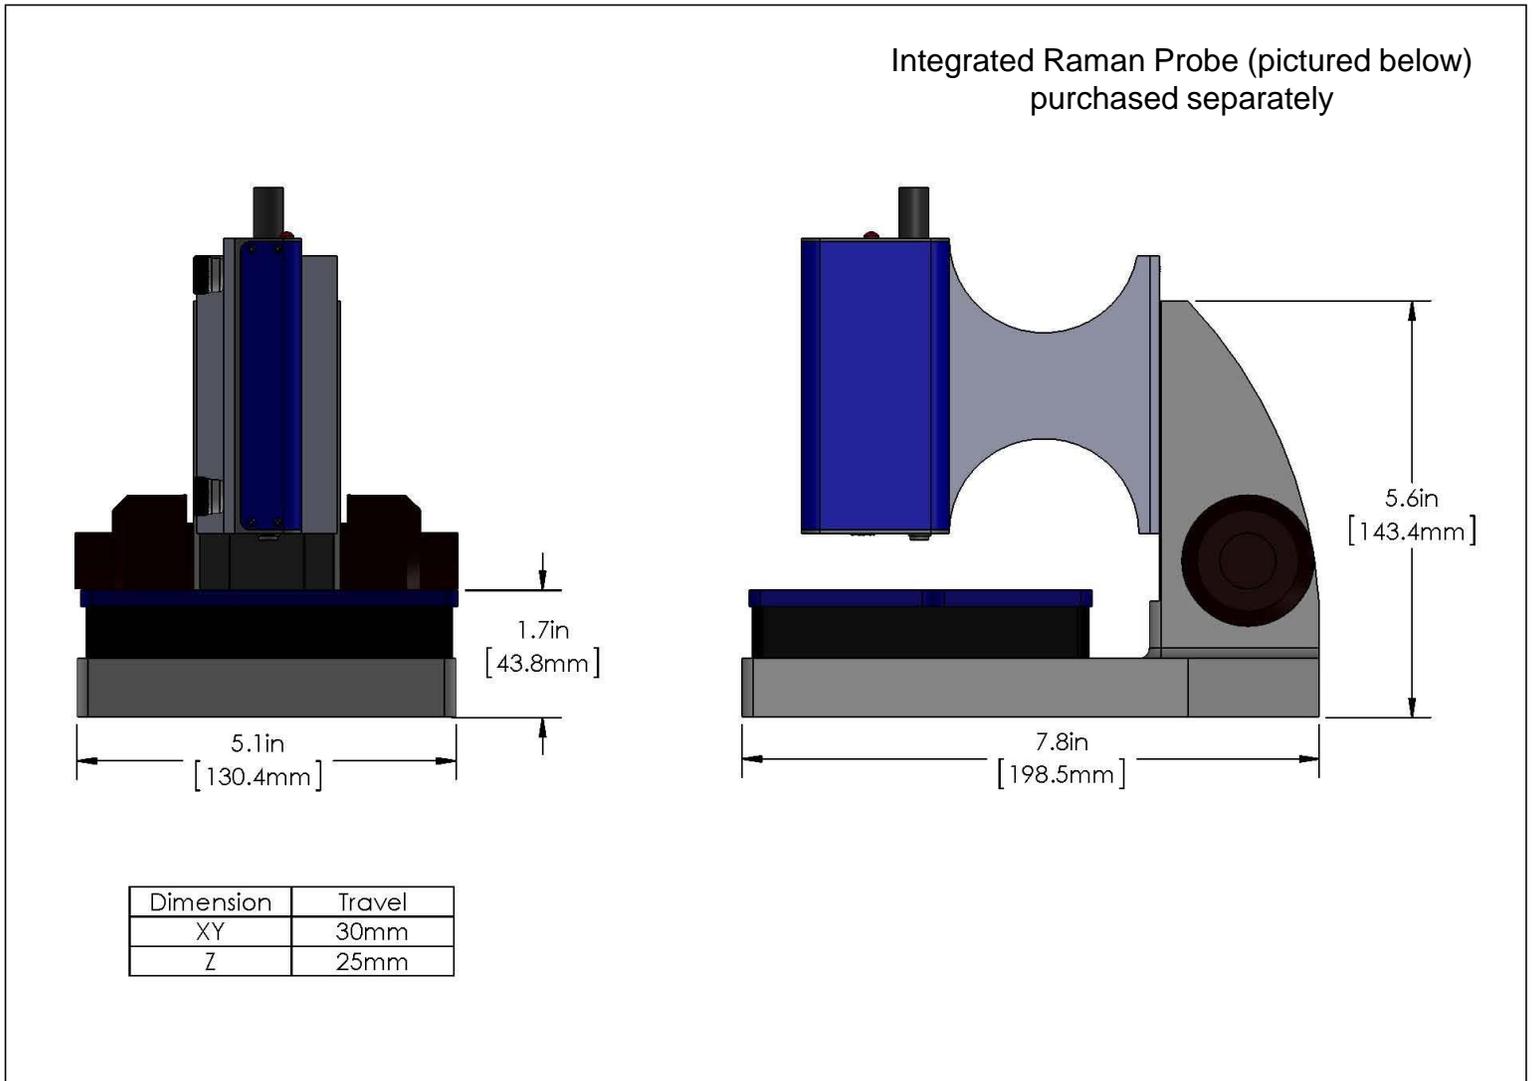

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND THE SOLE PROPERTY OF INNOVATIVE PHOTONIC SOLUTIONS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INNOVATIVE PHOTONIC SOLUTIONS IS PROHIBITED.	TITLE: XYZ-Stage		DWG. NO. 1401A900_XYZ-StageAssembly_RevC		SHEET 1 OF 1	
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		Drawn	Date	MFG Eng	Date
	ECCN:		ECCN EXCEPTION:		J.Gannon	06-10-2015

Double-Pass Liquid Sample Holder

- Double-pass liquid sample holder is meant for use with RPMC Integrated Raman Probe (IRP) with standard 40.5mm long lens tube with 9mm working distance lens
- Light tight liquid sample holder with Innovative sampling chamber containing an adjustable gold coated mirror increasing signal collection by 3X
- Liquid Sample Holder will give additional 3X higher throughput when IRP and double-pass mirror is used
- Liquid sample holder will be compatible with most common cuvette and vial sizes

