




High Power Diode Laser Bars

808 nm, 80 W cw

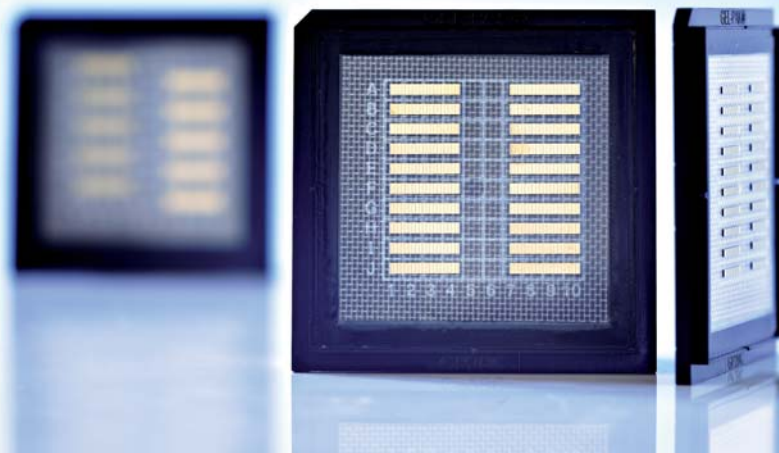

JDL-BAB-50-47-808-TE-80-2.0

Features:

- High laser power
- High efficiency
- Long lifetime, high reliability
- Excellent beam characteristics

Applications:

- Pumping of solid-state lasers and fiber lasers
- Industrial, scientific and medical systems
- Applications in the printing industry
- Defense and security

High Power Diode Laser Bars

808 nm, 80 W cw

Specifications

Product **JDL-BAB-50-47-808-TE-80-2.0**

	Symbol	Min	Nom	Max	Unit
Operation*					
Wavelength (cw)	λ	803	806	809	nm
Optical Output Power	P_{opt}		80		W
Operation Mode			cw, switched		
Power Modulation			100		%
Geometrical					
Number of Emitters			47		
Emitter Width	W	95	100	105	μm
Emitter Pitch	P		200		μm
Filling Factor	F		50		%
Bar Width	B	9600	9800	10000	μm
Cavity Length	L	1980	2000	2020	μm
Thickness	D	115	120	125	μm
Electro Optical Data*					
Fast Axis Divergence (FWHM)	$\theta_{ }$		36	39	$^{\circ}$
Fast Axis Divergence**	$\theta_{ }$		65	68	$^{\circ}$
Slow Axis Divergence at 80 W (FWHM)	θ_{\perp}		6	8	$^{\circ}$
Slow Axis Divergence at 80 W**	θ_{\perp}		6	9	$^{\circ}$
Pulse Wavelength	λ	798	801	804	nm
Spectral Bandwidth (FWHM)	$\Delta\lambda$		2	3	nm
Slope Efficiency***	η	1.15	1.2		W/A
Threshold Current	I_{th}		19	22	A
Operating Current	I_{op}		85	92	A
Operating Voltage	V_{op}		1.8	2.0	V
Series Resistance	R_s		2	4	m Ω
Degree of TE Polarization	α	98			%
EO Conversion Efficiency***	η_{tot}	51	55		%

* Mounted on a heat sink with $R_{th} = 0.5 \text{ K/W}$, coolant temperature $25 \text{ }^{\circ}\text{C}$, operating at nominal power


** Full width at 95 % power content

*** Item may change upon notice and acceptance by JENOPTIK Diode Lab GmbH, due to future improvements of technology or processing


Note: Nominal data represents typical values.

Safety Advices: Laser bars are the active components in high-power diode lasers in accordance to IEC standard class 4 laser products. As delivered, laser bars cannot emit any laser beam. The laser beam can only be released if the bars are connected to a source of electrical energy. In this case, IEC-Standard 60825-1 describes the safety regulations to be taken to avoid personal injury.

Power - Current - Voltage - Characteristics*

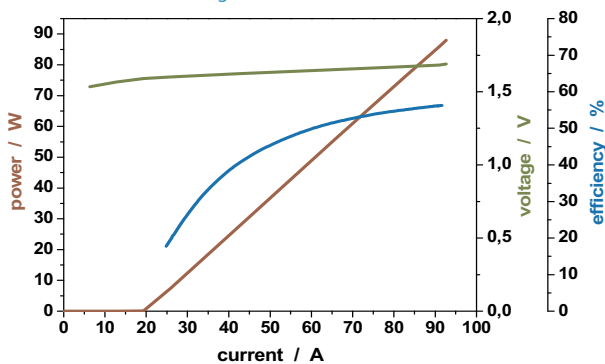

Spectral Characteristic*

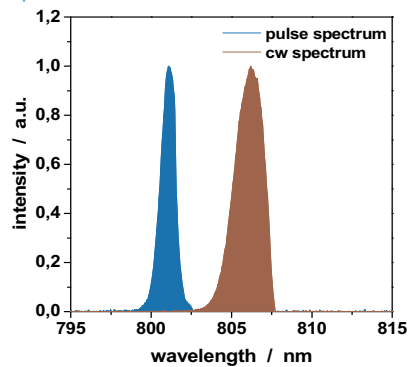

JENOPTIK | Lasers & Material Processing

JENOPTIK Diode Lab GmbH

Max-Planck-Strasse 2 | 12489 Berlin | Germany

Sales contact: JENOPTIK Laser GmbH | Phone: +49 3641 65-3053 | Fax: -4011

E-mail: sales-laser.lm@jenoptik.com | www.jenoptik.com/diodelasers

