

WEDGE XF 532nm Plus


Spec. #: WXFP19A03

Diode Pumped Solid State Laser



MAIN FEATURES

- _ 532 nm
- _ 400 ps
- _ up to 40 uJ
- _ Compact Design
- _ Air Cooled



Technical Specifications

Output Wavelength	532	nm
Q-Switch Repetition Rate	50 to 200	kHz
Average Power up to 100 kHz	> 2	W
Pulse Width	0.4 to 1.5	ns
Low Jitter Option (for direct Q-Switch driving)	< 300	ps
Pulse to pulse Energy stability (RMS)	< 5% at 50 kHz	
Polarization	Linear 100:1	
M ²	< 1.3	
Beam diameter (1/e ²)	< 2.5 (<i>collimated</i>)	mm
Pulse frequency control input	TTL (0 to 5V)	
Energy level control input	0 to 10 V (Analog)	
Cooling	Air Cooling, integrated thermostatic fan	
Power supply input	24 V DC – 6 A	
Control Connector	DB 25 pin	
Optional AC/DC power supply	100 – 230 VAC	
Size of the unit	18 x 9 x 7	cm ³
Weight	< 3	kg



All information included in this document are subject to change without notice.

Updated data sheets can be provided on request.

For further details, please contact your local **Bright Solutions** sales representative or visit our website at www.brightsolutions.it


Bright Solutions Srl

Via Artigiani, 27
27010 Cura Carpignano - PV
Italy

Ph. +39 0382583094

e-mail: sales@brightsolutions.it

Mechanical Drawings

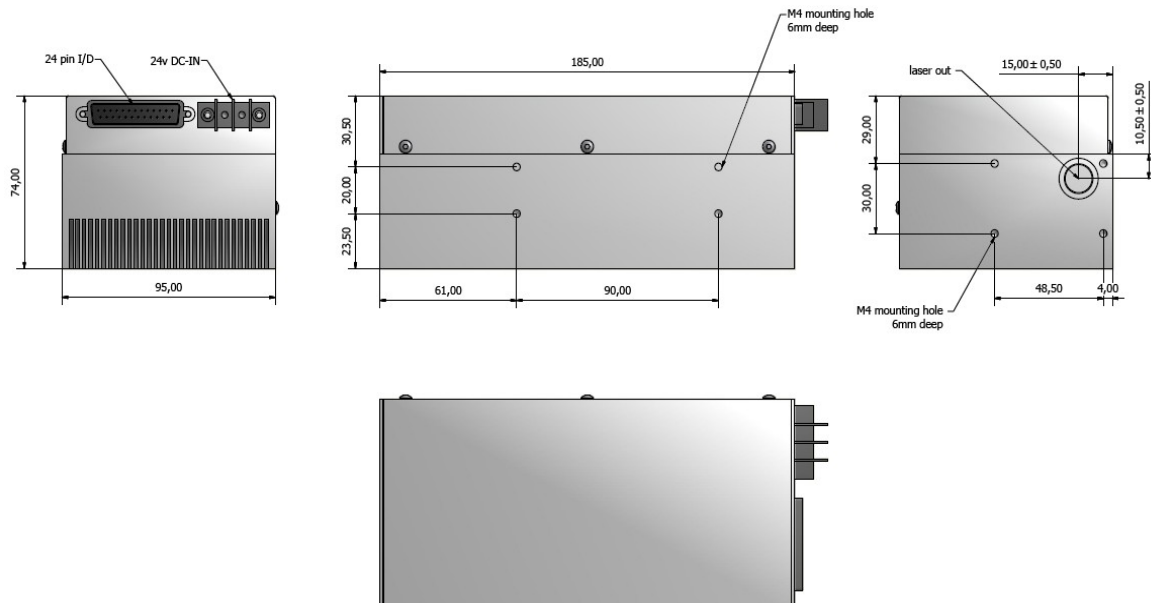

All dimensions are in mm

Options Available:	Applications:
<ul style="list-style-type: none"> - Beam Expanding and Collimating optics - Red aiming beam - Circular Polarization - Water and contact cooling 	<ul style="list-style-type: none"> - Ablation / Micromachining of thin films - LIDAR - LADAR - LIBS - Specialty Scribing / Material processing



All information included in this document are subject to change without notice.

Updated data sheets can be provided on request.

For further details, please contact your local **Bright Solutions** sales representative or visit our website at www.brightsolutions.it

Bright Solutions Srl
Via Artigiani, 27
27010 Cura Carpignano - PV
Italy
Ph. +39 0382583094
e-mail: sales@brightsolutions.it