

High-power diode laser bars:

808 nm, 300 W qcw

JDL-BAB-75-62-808-TE-300-1.5

Features

- High laser power
- High efficiency
- Long lifetime, high reliability
- Excellent beam characteristics

Applications

- Pumping of solid-state lasers and fiber lasers
- Industrial, scientific and medical systems
- Printing industry
- Defense and security

High-power diode laser bars | 808 nm, 300 W qcw

JDL-BAB-75-62-808-TE-300-1.5

Specifications

JDL-BAB-75-62-808-TE-300-1.5

Operation*	Symbol	Min	Nom	Max	Unit
Wavelength (qcw)	λ	805	808	811	nm
Optical Output Power	P_{opt}		300		W
Operation Mode			pulsed		
Power Modulation			100		%
Geometrical					
Number of Emitters			62		
Emitter Width	W	90	100	110	μm
Emitter Pitch	P		150		μm
Filling Factor	F		75		%
Bar Width	B	9600	9800	10000	μm
Cavity Length	L	1480	1500	1520	μm
Thickness	D	115	120	125	μm
Electro Optical Data*					
Fast Axis Divergence (FWHM)	θ_{\perp}		36	39	$^{\circ}$
Fast Axis Divergence**	θ_{\perp}		65	68	$^{\circ}$
Slow Axis Divergence at 300 W (FWHM)	θ_{\parallel}		8	9	$^{\circ}$
Slow Axis Divergence at 300 W**	θ_{\parallel}		10	11	$^{\circ}$
Pulse Wavelength	λ	805	808	811	nm
Spectral Bandwidth (FWHM)	$\Delta\lambda$		3	5	nm
Slope Efficiency***	η	1.15	1.25		W/A
Threshold Current	I_{th}		22	25	A
Operating Current	I_{op}		262	285	A
Operating Voltage	V_{op}		2.1	2.2	V
Series Resistance	R_s		3	4	m Ω
Degree of TE Polarization	α	98			%
EO Conversion Efficiency***	η_{tot}	52	55		%

* Mounted on a heat sink with $R_{th} = 0.7$ K/W, coolant temperature 25 °C, operating at nominal power, 200 μsec pulse length and 4 % duty cycle


** Full width at 95 % power content

*** Item may change upon notice and acceptance by JENOPTIK Diode Lab GmbH, due to future improvements of technology or processing


Note: Nominal data represents typical values.

Safety Advice: Laser bars are the active components in high-power diode lasers in accordance to IEC standard class 4 laser products. As delivered, laser bars cannot emit any laser beam. The laser beam can only be released if the bars are connected to a source of electrical energy. In this case, IEC-Standard 60825-1 describes the safety regulations to be taken to avoid personal injury.

Power - Current - Voltage - Characteristics*

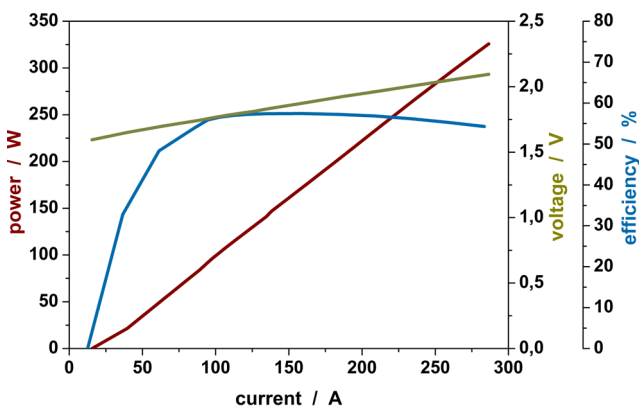

Spectral Characteristics*

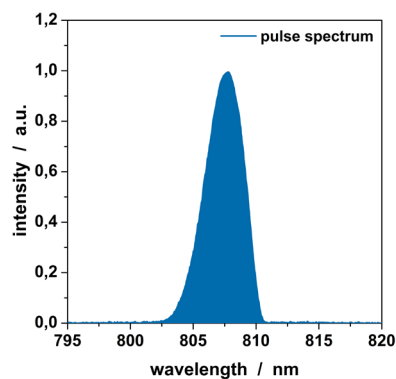

JENOPTIK Diode Lab GmbH | Max-Planck-Strasse 2
12489 Berlin | Germany

Sales contact:

JENOPTIK Laser GmbH
Phone +49 3641 65-3053 | Fax +49 3641 65-4011
laser.sales@jenoptik.com | www.jenoptik.com

