

**635nm&520nm&445nm Tri-Wavelength Pigtailed Laser Module Output From 1pc 9um Fiber| RGB LD Module
Triplex Pigtailed Laser Module with White Light Output | Red, Green, Blue Laser Output From 9um Fiber
Triplex-RWLX-445/030m-520/030m-635/030m-9-H-T**

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	-10 ~ +50	°C
Storage Temperature	T_{stg}	-40 ~ +80	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C

Features:

- 445nm&520nm&635nm Tri-wavelength Output
- RGB Laser Output From 9um Fiber
- Built-in TEC Cooler
- Compact Package Size

Applications:

- Endoscopy
- Aiming Beam
- Bioscience
- Illumination




Specifications

Triplex-RWLX-445/030m-520/030m-635/030m-9-H-T

	Wavelength-1	Wavelength-2	Wavelength-3
Center Wavelength	445nm	520nm	635nm
Output Power (CW)	30mW	30mW	30mW
Threshold Current (Typ.)	30mA	40mA	50mA
Operating Current (Typ.)	120mA	200mA	160mA
Operating Voltage	6.0V	7.5V	2.7V
Recommended Operating Temperature	25°C		
TEC Max Current	3.5A		
TEC Max Voltage	7.0V		
Thermistor	10K		
Fiber Type	SMF-28		
Fiber Core Diameter	9um		
Fiber Length	80cm		
Connector Type	FC/SMA905		
Package	HHL		

Package View

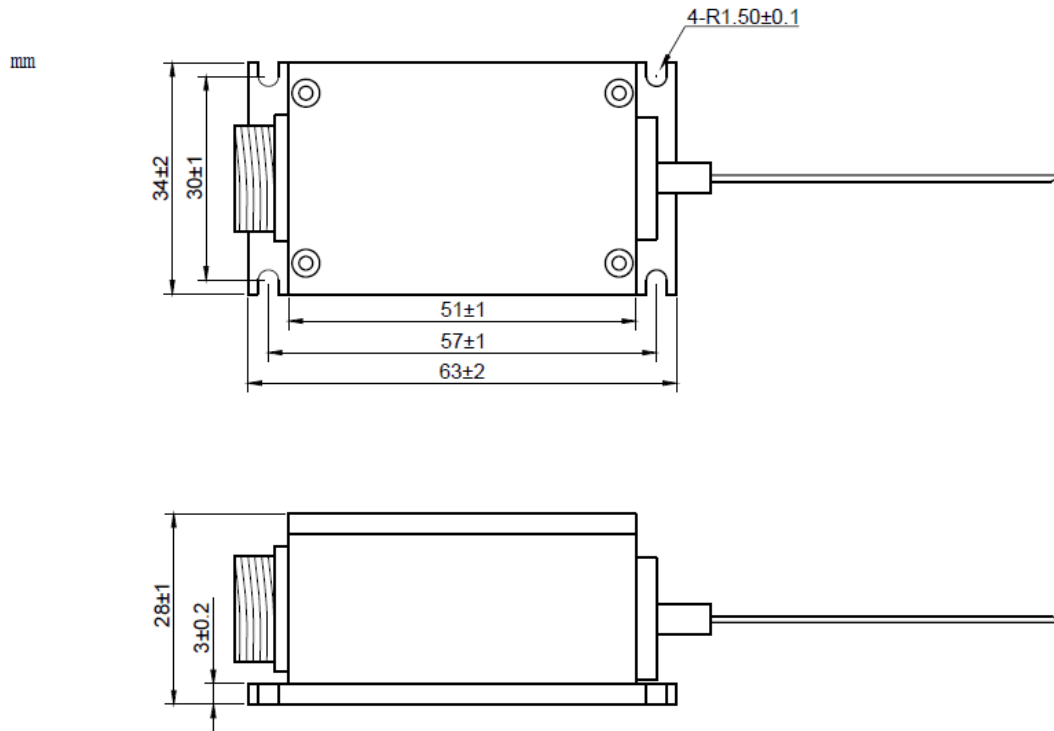

We offer **Customized 445nm & 520nm & 635nm Tri-Wavelength Module** Which is output from one 9um Fiber.

- Customized Output Power (Such as 20mW@445nm & 20mW@520nm & 20mW@635nm)
- Built-in TEC Cooler Optional
- Fiber Detachable Package Optional

