


**465nm~470nm 2W~2.5W Fiber Coupled LD| Blue Laser Diode| Coaxial Package**  
**460nm~465nm 2W Pigtailed Laser Diode| 105um 200um MM Fiber| Built-in PD Optional**  
**RWLP-465-002-M**

465nm Pigtailed Diode Laser		2W/MM Fiber	
PARAMETER	SYMBOL	VALUE	UNIT
MAX Reverse Current	$I_r$	80	mA
Operating Temperature	$T_{op}$	0 ~ +60	°C
Storage Temperature	$T_{stg}$	-40 ~ +85	°C
Lead soldering temperature (10 sec.)	$T_{is}$	260	°C
<b>Features:</b> <ul style="list-style-type: none"> <li>• 465nm</li> <li>• B9 Package</li> <li>• TEC Cooling Optional</li> <li>• Photodiodes Optional</li> </ul>			
<b>Applications:</b> <ul style="list-style-type: none"> <li>• Medical Laser Treatment</li> <li>• Laser Show</li> <li>• Others</li> </ul>			
<b>Specifications</b>	<b>RWLP-465-002-M</b>		
	Min	Type	Max
Center Wavelength@25°C	455nm	465nm	475nm
Spectral Width (FWHM)	----	3.0nm	----
Output Power	----	2.0W	----
Fiber Type	Multi-mode Fiber		
Fiber Core	105um (200um Optional)		
Recommended Operating Temperature	25°C		
Fiber Connector	FC/ST/SMA905		
Fiber Length	>80cm		
Threshold Current (Typ.)	----	0.4A	0.6A
Operating Current (Typ.)	----	2.5A	3.0A
Operating Voltage	----	4.5V	5.5V
Package Style	B9		
Built-in Photodiode	Optional		
Built-in TEC Cooling	Optional		

**B9 Package View:**

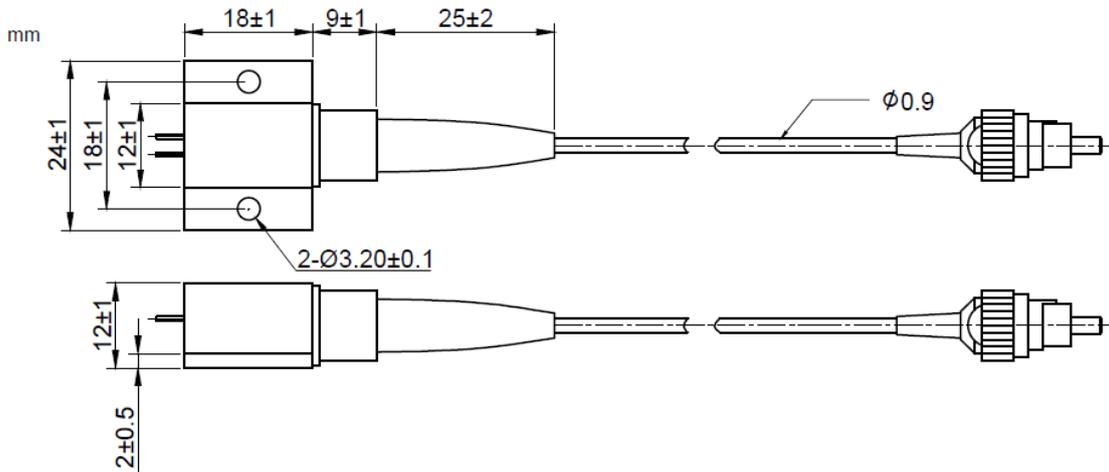

**PIN Bottom View:**



Electrically shorten LD module and store in non-extreme conditions.  
Suggest using the constant current power supply.

