


# 760nm DM LASER

REP760-DM-TP39




www.rpmclasers.com

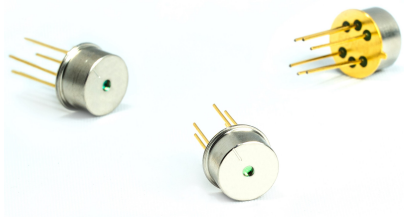


## ADVANCED O<sub>2</sub> DETECTION

The REP760-DM laser diode is the perfect tool for TDLAS-based O<sub>2</sub> sensing. Our patented Discrete-Mode (DM) technology is used to design a cost effective, highly coherent and stable single mode laser.

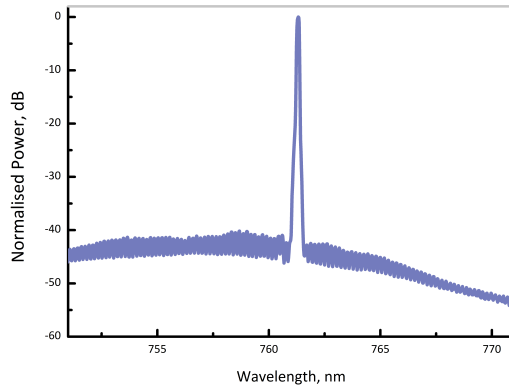

Representative optical Spectrum at 25°C

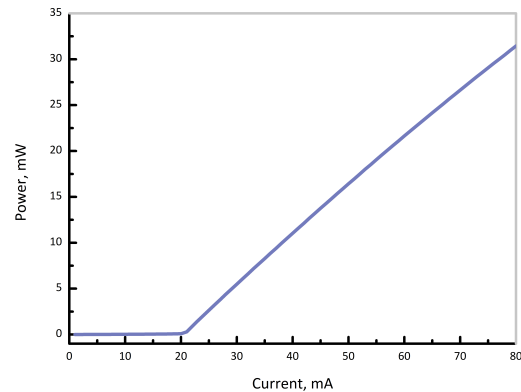

Representative LIV plot

## ELECTRO-OPTICAL CHARACTERISTICS (T<sub>SUB</sub> = 25° C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Centre Wavelength (25°C, 80mA)	$\lambda$	759	761	764	nm
Tuning Range (without Mode Hops)*	$\lambda_{\text{tune}}$	0.25	0.5	-	nm
Side Mode Suppression Ratio	SMSR	30	35	-	dB
Threshold Current	$I_{\text{th}}$	-	20	-	mA
Output Power (50mA)	$P_f$	-	15	-	mW
Temperature Tuning Coefficient	$T_\lambda$	-	0.06	-	nm/°C
Current Tuning Coefficient	$I_\lambda$	-	10	-	pm/mA
Slope Efficiency	SE	-	0.5	-	mW/mA
Thermistor Resistance	$R_T$	9.7	10	10.3	k $\Omega$
Beta Coefficient (25°C/85°C)	Beta	-	3930	-	K
Beam divergence - perpendicular	$\theta_\perp$	-	20	-	degrees
Beam divergence - parallel	$\theta_\parallel$	-	10	-	degrees


the operating temperature range of the laser (15 – 35C)

\*Tuning range is defined to be within

PARAMETER	SYMBOL	MIN	MAX	UNIT
Forward Current	$I_f$	-	80	mA
Forward Voltage	$V_f$	-	2.5	V
TEC Current	$I_{TEC}$	-	0.7	A
Reverse Voltage LD	$V_r$	-	2.0	V
Case Temperature*	$T_{Case}$	-20	65	°C
Storage Temperature	$T_{storage}$	-40	85	°C

**PACKAGING**


The REP760-DM-TP39 product series is offered in an industry-standard TO39 package - Inquire for other packaging options. The standard package pinout is shown below, variations may be requested.

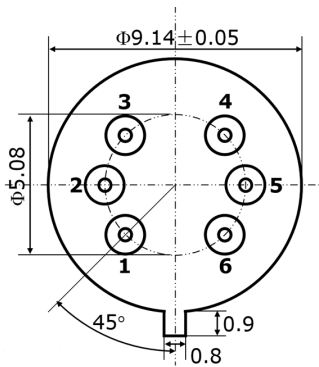

TO39 schematic - outside bottom view

PIN NO	DESCRIPTION
1	TEC+
2	LD+
3	Thermistor
4	Thermistor
5	LD-
6	TEC-

Standard "Pinout 01" option

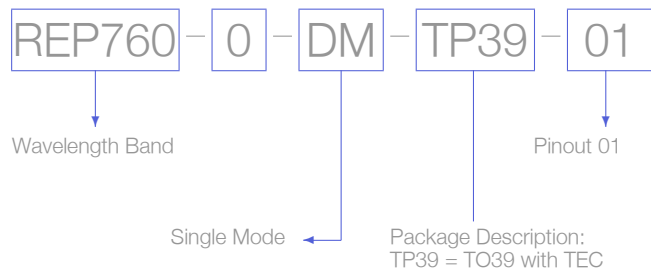

**Laser Safety**

This is a Class 3R Laser Product as defined by International Standard IEC 60825-1, Edition 2. Invisible Laser radiation is emitted from the end of the fiber or connector. Avoid direct eye exposure to the beam. Laser safety labels are not attached to the module due to space limitations but instead are affixed to the outside of the shipping carton.