
MegaWatt Lasers

MK-367
RESONATOR
Permanently Aligned Q-Switched Resonator





6 MW, 25mJ, 4ns, 1.06 µm

MegaWatt Lasers is pleased to announce the development of a 25 mJ passively Q-switched Nd:YAG resonator capable of producing over 6 MW at $\frac{1}{3}$ *Hz*

SPECIFICATIONS


Parameter	Value
Wavelength	1.064 µm
Pulse Energy:	25 mJ
Repetition Rate:	1/3 Hz (passive cooling)
Pulse Width:	4 ns
Raw Beam Diameter:	3 mm
Beam Divergence:	90% less than 1 mrad full angle
Output Stability:	Less than +/- 10%
Beam Mode:	Low order
Required Input Energy:	6 J
Trigger Input:	10 KV, 1 µs pulse to ionize flashlamp
Size:	10 cm x 2.1 cm (L x Diameter)
Weight:	58 g
Lifetime:	> 300, 000 shots


For more information contact: info@rpmclasers.com

8495 Veterans Memorial Pkwy | O'Fallon, MO 63366 | 636.272.7227


MK367 LASER OUTLINE


REV	DATE	DESCRIPTION



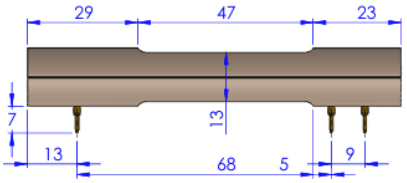

BEAM DIRECTION

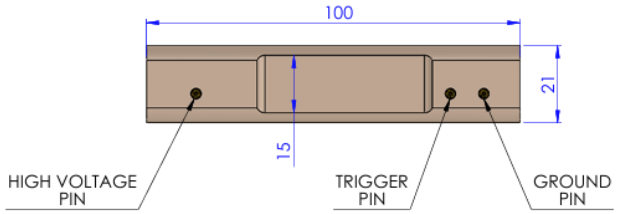



NOTES:
1. Units in mm unless noted.

NOTICE: This document contains proprietary and confidential information of MegaWatt Lasers. The contents shall not be disclosed, reproduced, duplicated, disseminated, or used for purposes other than authorized in writing by MegaWatt Lasers.

DRAWN BY CRH		MegaWatt Lasers P. O. Box 24190 Hilton Head Island, SC 29925
CHECKED BMH	TOLERANCES X ±0.5 X.X ±0.1 X.XX ±0.05	MK367 LASER OUTLINE
APPROVED CRH		SIZE C · CAGE CODE 1HVC0 · DRAWING NO. 1738 · REV OR SCALE NTS · DATE 22-JANUARY-2024 · SHEET 1 OF 1

For more information contact: info@rpmclasers.com

8495 Veterans Memorial Pkwy | O'Fallon, MO 63366 | 636.272.7227